


KNT 50/2 C.402




GIRANTE RADIALE
RADIAL IMPELLER
ROUE RADIALE

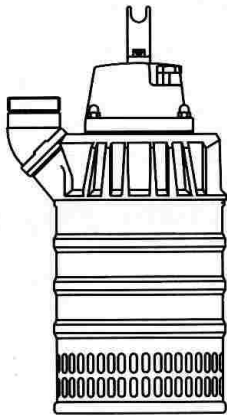

ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2
Curves as per ISO 9906. Grade 2
Courbes selon ISO 9906. Niveau 2

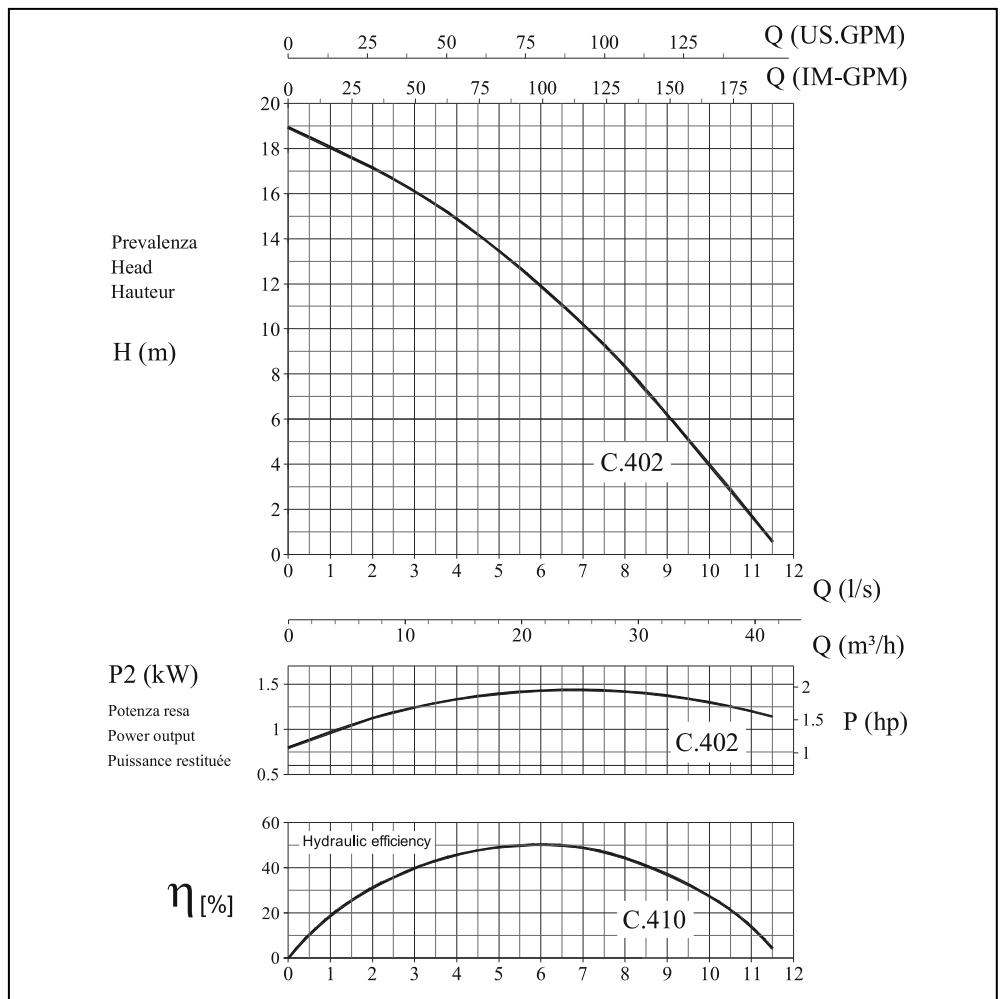

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza - Head - Hauteur										Hm bar									
	1	2	4	6	8	10	12	14	16	18	20	1,4	1,6	1,8	2,0					
	0,1	0,2	0,4	0,6	0,8	0,1	1,2	1,4	1,6	1,8	2,0	Portata - Capacity - Débit				Q (l/s)				
KNT 50/2/115 C.402	11.5	11	10	9	8	7	6	4,5	3	1										

Dati tecnici / Specifications / Données

	Mandata Delivery Refoulement	kW		r.p.m	Poles	Ampere	Hz		
		P1	P2	1/min		Trifase 3~ 400V			
KNT 50/2/115 C.402	2"	1,75	1,4	2800	2	2,9	50		

Dimensioni di ingombro
Overall dimensions of packing
Dimensions d'encombrement des emballages

TIPO-TYPE	X	Y	Z	Kg
KNT 50/2/115 C.402				

