


KNT 80/2 C.406



GIRANTE RADIALE
RADIAL IMPELLER
ROUE RADIALE

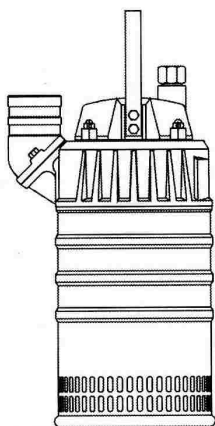


ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2

Curves as per ISO 9906. Grade 2

Courbes selon ISO 9906. Niveau 2

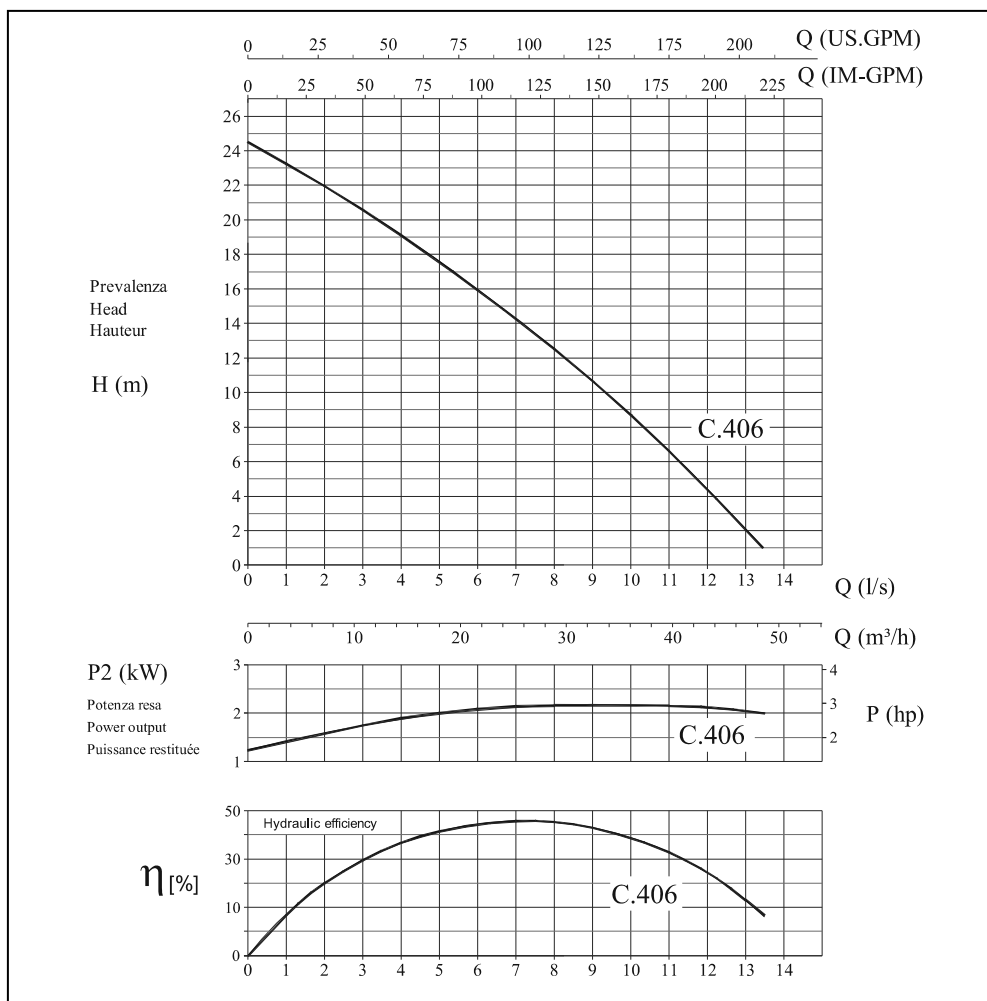

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza - Head - Hauteur										
	Hm bar										
	4	6	8	10	12	14	16	18	20	22	24
	Portata - Capacity - Débit										
	Q (l/s)										
KNT 80/2 C.406	12	11.5	10.5	9.2	8.2	7	6	4,5	3.5	2	0.5

Dati tecnici / Specifications / Données

	Mandata Delivery Refoulement	kW		r.p.m	Poles	Ampere	Hz		
		P1	P2	1/min		Trifase 3~ 400V			
KNT 80/2 C.406	3"	3,0	2,2	2800	2	5,5	50		

Dimensioni di ingombro

Overall dimensions of packing

Dimensions d'encombrement des emballages

TIPO-TYPE	X	Y	Z	Kg
KNT 80/2 C.406				

