


## KNT 100/2 C.408




GIRANTE RADIALE  
RADIAL IMPELLER  
ROUE RADIALE

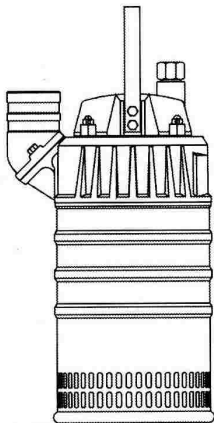

ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2  
Curves as per ISO 9906. Grade 2  
Courbes selon ISO 9906. Niveau 2

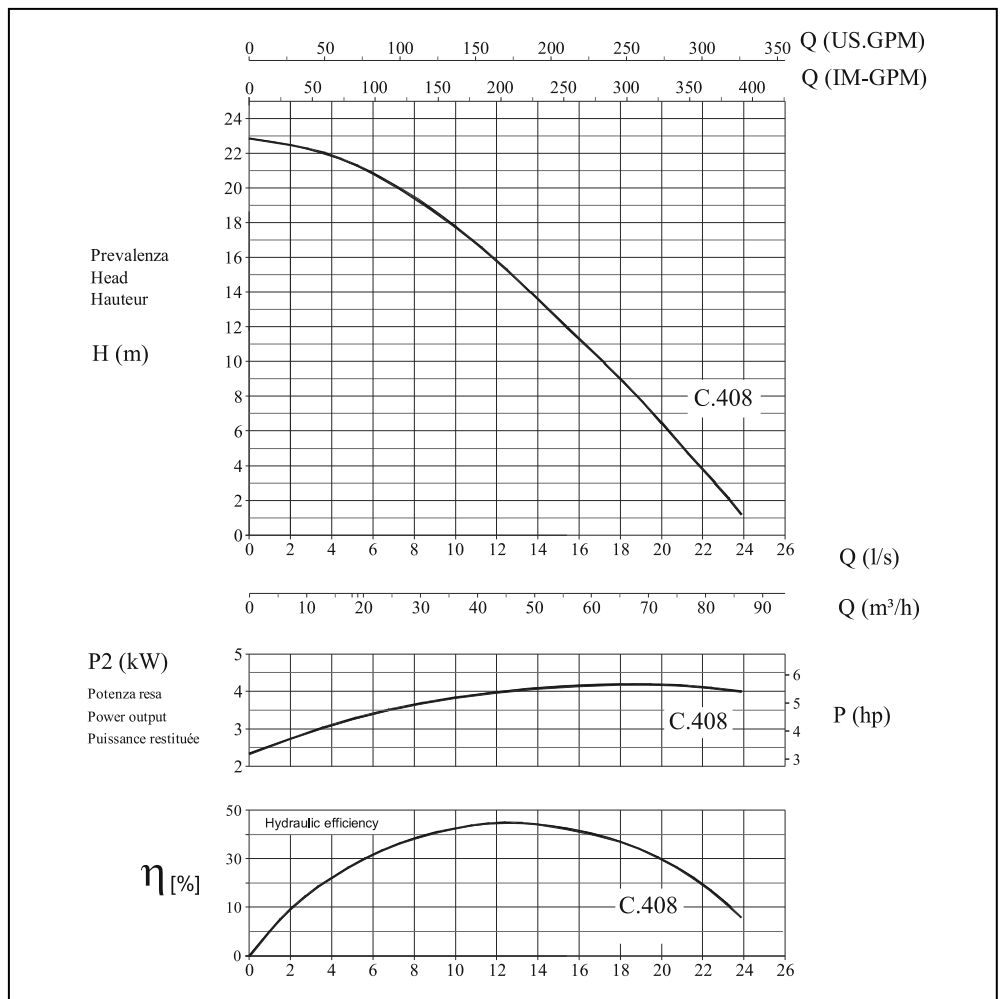

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza - Head - Hauteur										
	Hm bar										
	2	4	6	8	10	12	14	16	18	20	22
	Portata - Capacity - Débit										
	Q (l/s)										
KNT 100/2 C.408	23	22	20	10.5	19	15	14	12	10	7	4

Dati tecnici / Specifications / Données

	Mandata Delivery Refoulement	kW		r.p.m	Poles	Ampere	Hz		
		P1	P2	1/min		Trifase 3~ 400V			
KNT 100/2 C.408	3"	5,0	4,2	2800	2	8,7	50		

Dimensioni di ingombro

Overall dimensions of packing

Dimensions d'encombrement des emballages

TIPO-TYPE	X	Y	Z	Kg
KNT 100/2/ C.408				

