


KNT 100/2 C.412




GIRANTE RADIALE
RADIAL IMPELLER
ROUE RADIALE

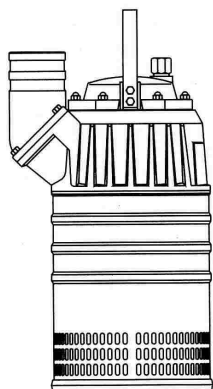

ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2
Curves as per ISO 9906. Grade 2
Courbes selon ISO 9906. Niveau 2

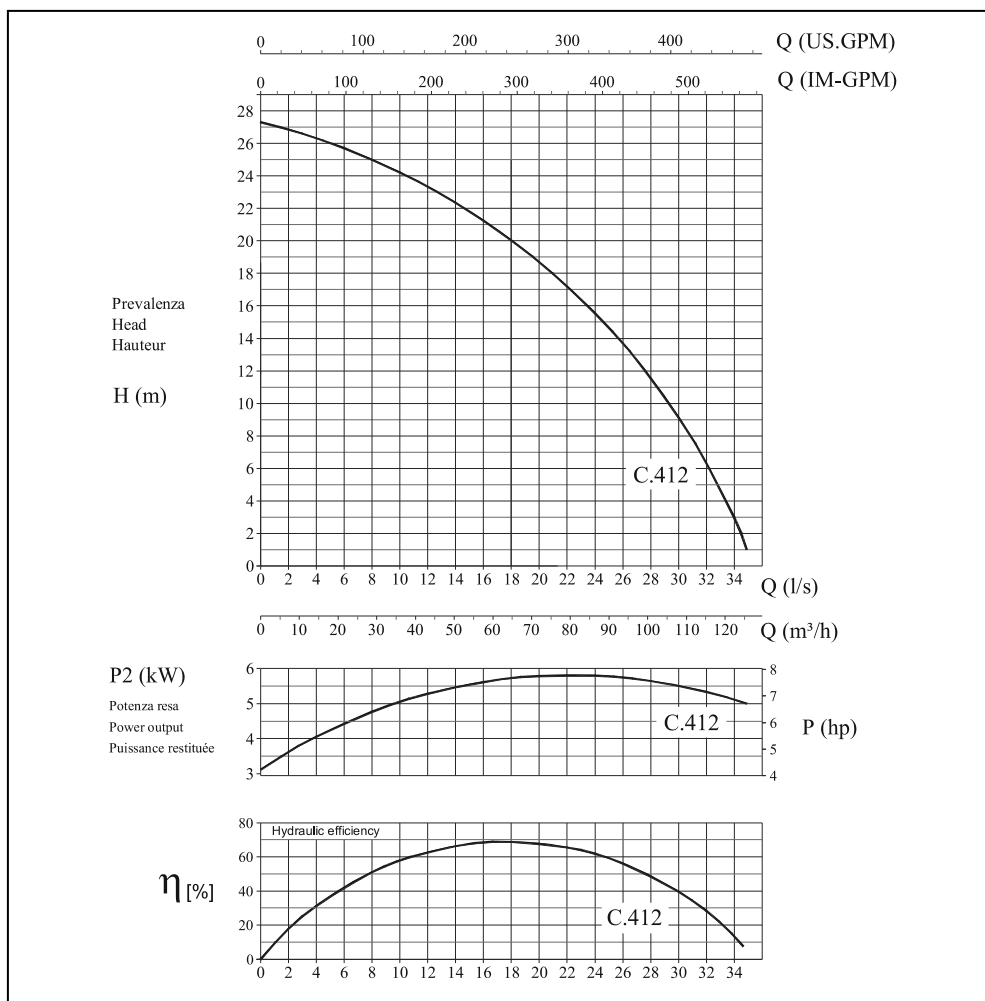

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza - Head - Hauteur										
	Hm bar										
	1	3	6	9	12	15	18	21	24	27	30
	0,1	0,3	0,6	0,9	1,2	1,5	1,8	2,1	2,4	2,7	3,0
KNT 100/2 C.412	Portata - Capacity - Débit										
	Q (l/s)										
	35	34	32	30	28	24	21	16	10	1	

Dati tecnici / Specifications / Données

	Mandata Delivery Refoulement	kW		r.p.m	Poles	Ampere	Hz		
		P1	P2	1/min		Trifase 3~ 400V			
KNT 100/2 C.412	4"	6,8	5,8	2800	2	12	50		

Dimensioni di ingombro
Overall dimensions of packing
Dimensions d'encombrement des emballages

TIPO-TYPE	X	Y	Z	Kg
KNT 100/2 C.412				

