


# KNT 100/2 C.416




GIRANTE RADIALE  
RADIAL IMPELLER  
ROUE RADIALE

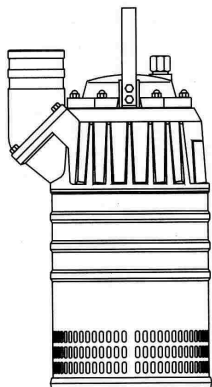

ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2  
Curves as per ISO 9906. Grade 2  
Courbes selon ISO 9906. Niveau 2

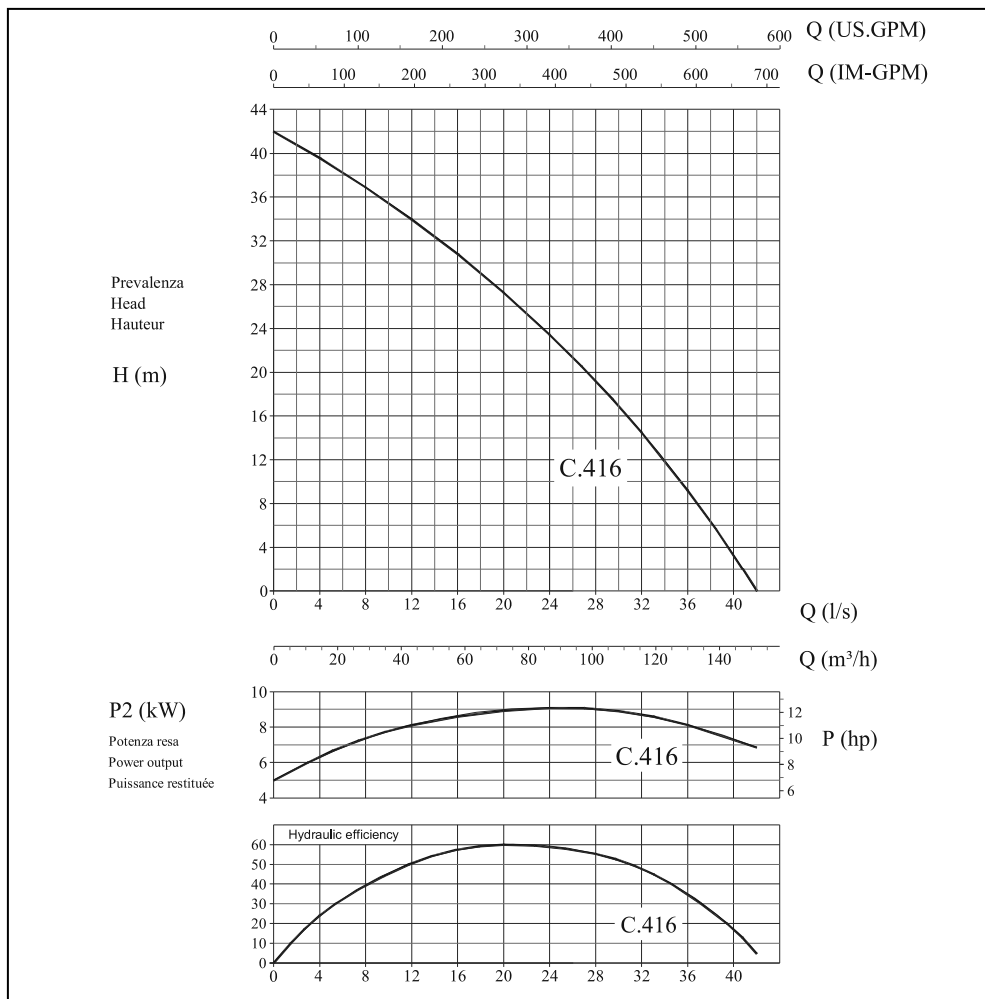

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza - Head - Hauteur										
	Hm bar										
	4	8	12	16	20	24	28	32	36	40	44
	Portata - Capacity - Débit										
	Q (l/s)										
KNT 100/2 C.416	39	37	34	31	27	23	19	14	9	3	

Dati tecnici / Specifications / Données

	Mandata Delivery Refoulement	kW		r.p.m	Poles	Ampere	Hz		
		P1	P2	1/min		Trifase 3~ 400V			
KNT 100/2 C.416	4"	11	9,4	2800	2	18	50		

Dimensioni di ingombro

Overall dimensions of packing

Dimensions d'encombrement des emballages

TIPO-TYPE	X	Y	Z	Kg
KNT 100/2/ C.416				

