


## COMPATTA 1



GIRANTE VORTEX  
VORTEX IMPELLER  
ROUE VORTEX




PASSAGGIO LIBERO	20mm
FREE PASSAGE	20mm
SECTION DE PASSAGE	20mm

ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2

Curves as per ISO 9906. Grade 2

Courbes selon ISO 9906. Niveau 2

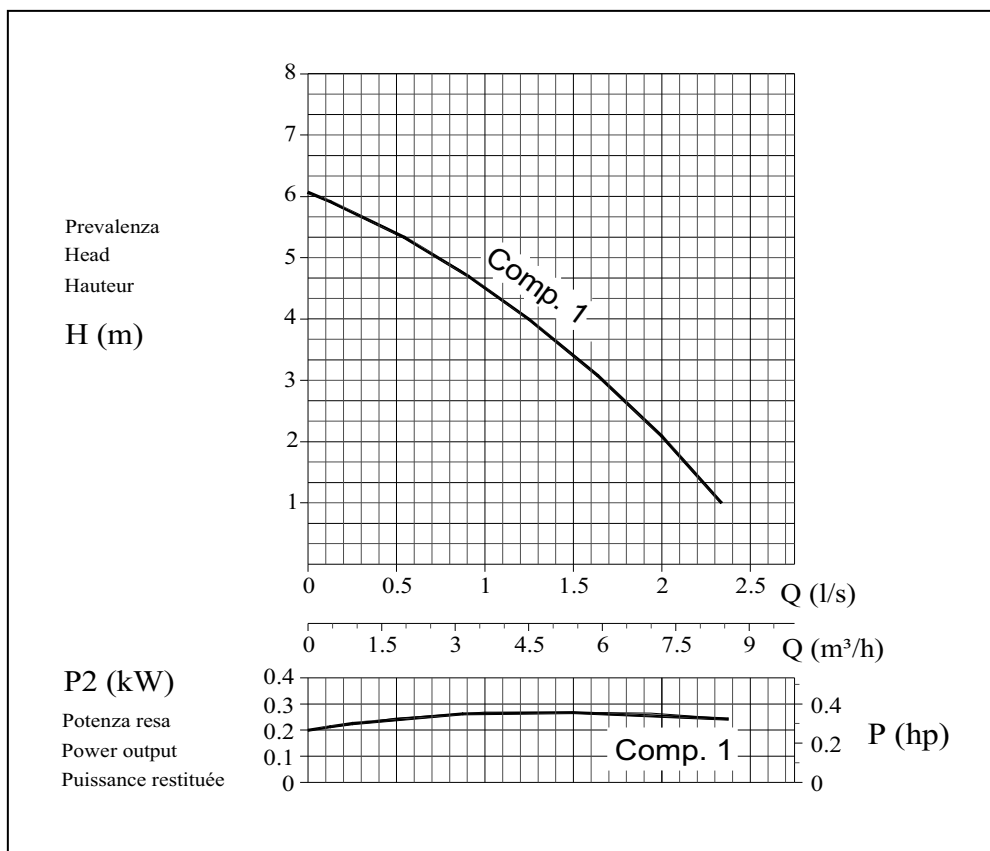

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza - Head - Hauteur											
	1	2	3	4	5	6	7	8	9	10	11	
	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1	1,1	
	Portata - Capacity - Débit											
	Q (l/s)											
COMPATTA 1 M/T	2,3	2	1,65	1,2	0,7	0,05						

### Dati tecnici / Specifications / Données

	Mandata Delivery Refoulement	kW		r.p.m	Poles	Hz	Ampere		
		P1	P2	1/min			1~		400 V 3~
							230 V	uf	
COMPATTA 1 M/T	G 1" ¼	0,35	0,28	2850	2	50	2,4	8	0,85

M = 1~ 230 VOLT - 50 Hz


T = 3~ 400 VOLT - 50 Hz

Dimensioni di ingombro

Overall dimensions of packing


Dimensions d'encombrement des emballages


TIPO-TYPE	X	Y	Z	Kg
COMPATTA 1 M/T	200	290	220	9






## Compatta 1

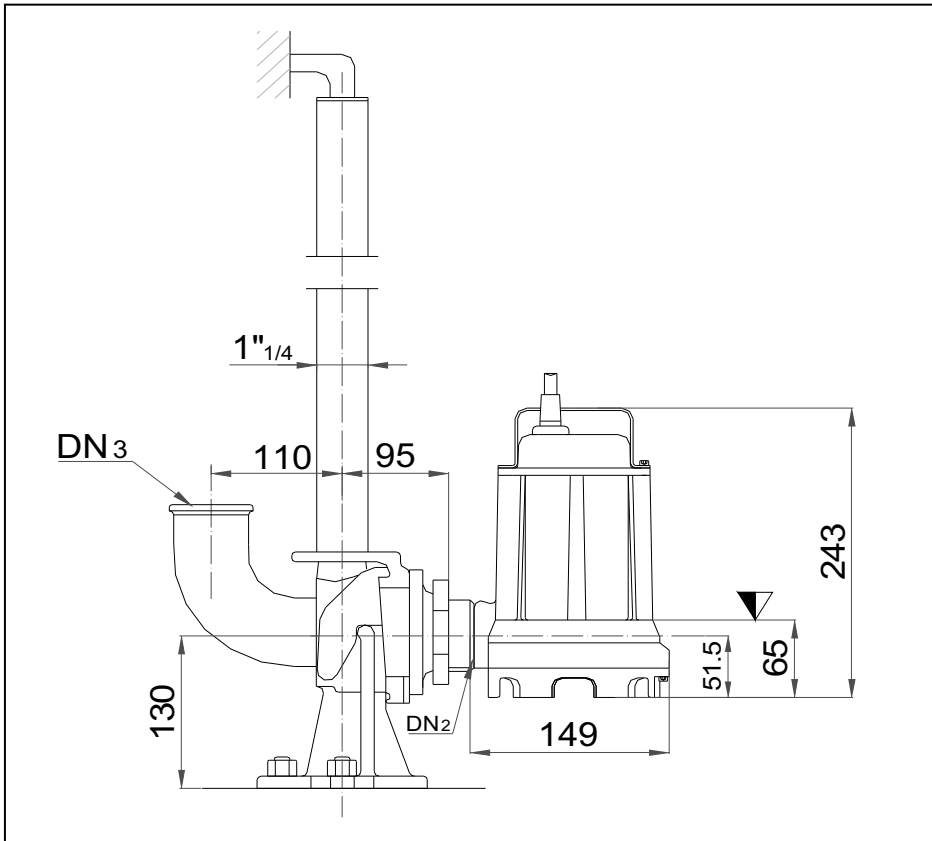INSTALLAZIONE FISSA  
STATIONARY INSTALLATION  
INSTALLATION FIXE



 Punto inferiore d'arresto nel caso di funzionamento automatico  
Lowest shut-off point for automatic operation  
Point d'arrêt le plus bas en service automatique

### CARATTERISTICHE TECNICHE - TECHNICAL FEATURES - CARACTERISTIQUES TECHNIQUES

TIPO - TYPE	DN2 Mandata filettata	DN3	CAVO - CABLE H07 - RNF	MT			OPTIONAL
Compatta 1 M	G 1" 1/4	2"	(1) 3x1 $\phi$ 9 Schuko-plug	10	Inferiore Lower Inférieur	Superiore Upper Supérieur	
Compatta 1 T			(1) 4x1 $\phi$ 10 con terminali liberi with free cable terminals avec bornes libres				