


COMPATTA 2-3




GIRANTE VORTEX
VORTEX IMPELLER
ROUE VORTEX

PASSAGGIO LIBERO	30mm
FREE PASSAGE	30mm
SECTION DE PASSAGE	30mm

ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2
Curves as per ISO 9906. Grade 2
Courbes selon ISO 9906. Niveau 2

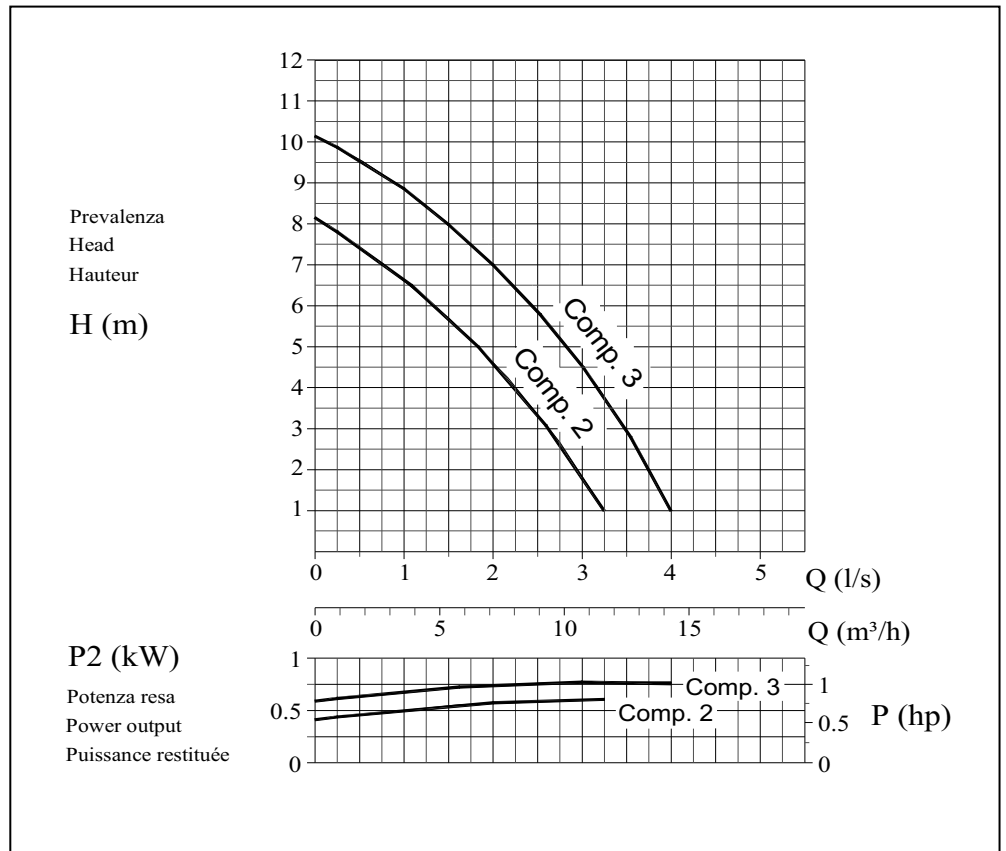

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza/Head - Hauteur										
	Hm bar										
	1	2	3	4	5	6	7	8	9	10	11
	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1	1,1
	Portata - Capacity - Débit										
	Q (l/s)										
COMPATTA 2 M/T	3,25	2,9	2,6	2,25	1,75	1,25	0,75	0,15			
COMPATTA 3 M/T	4	3,75	3,5	3,25	2,75	2,5	2	1,5	0,9	0,15	


Dati tecnici / Specifications / Données

	Mandata Delivery Refoulement	kW		r.p.m	Poles	Hz	Ampere		
		P1	P2	1/min			1~		400 V 3~
							230 V	uf	
COMPATTA 2 M/T	G 1" 1/2	0,73	0,59	2850	2	50	4,3	16	1,5
COMPATTA 3 M/T		0,93	0,75	2850	2	50	5,1	20	1,9

M = 1~ 230 VOLT - 50 Hz T = 3~ 400 VOLT - 50 Hz


Dimensioni di ingombro
Overall dimensions of packing
Dimensions d'encombrement des emballages


TIPO-TYPE	X	Y	Z	Kg
COMPATTA 2 M/T	200	365	230	13,5
COMPATTA 3 M/T	200	365	230	14,5







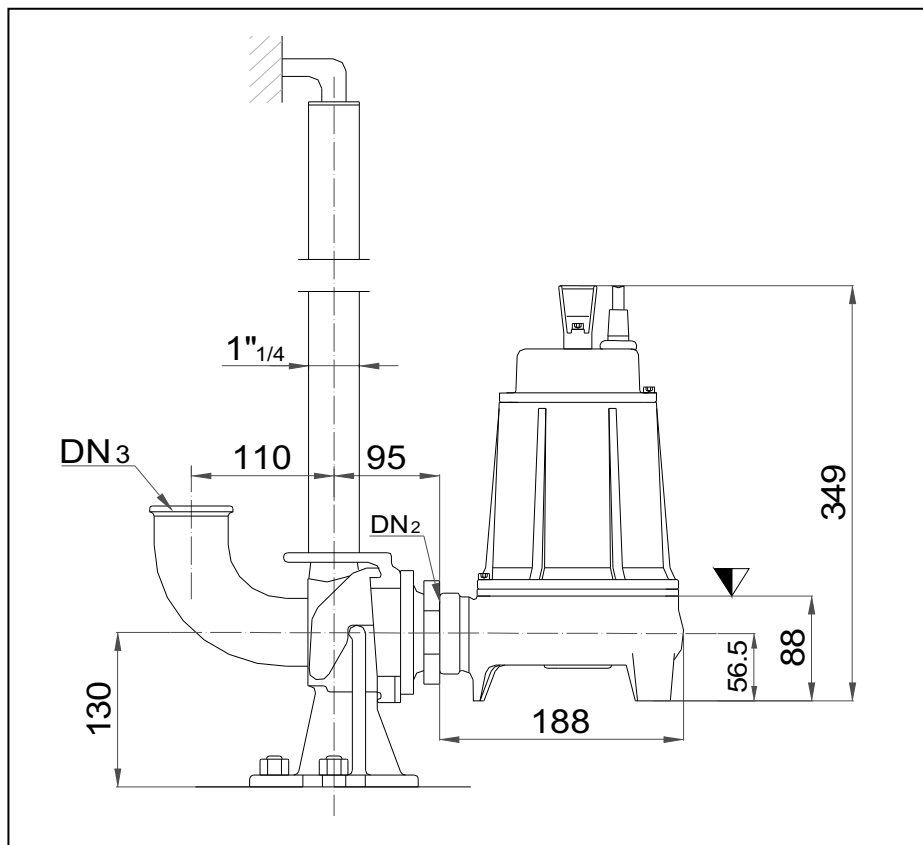


Compatta 2-3

INSTALLAZIONE FISSA
STATIONARY INSTALLATION
INSTALLATION FIXE



 Punto inferiore d'arresto nel caso di funzionamento automatico
Lowest shut-off point for automatic operation
Point d'arrêt le plus bas en service automatique

CARATTERISTICHE TECNICHE - TECHNICAL FEATURES - CARACTERISTIQUES TECHNIQUES

TIPO - TYPE	DN2 Mandata filettata	DN3	CAVO - CABLE H07 - RNF	MT				OPTIONAL		
Compatta 2 M Compatta 3 M	G 1" 1/2	2"	(1) 3x1 ϕ 9 Schuko-plug	10						
Compatta 2 T Compatta 3 T			(1) 4x1 ϕ 10 con terminali liberi with free cable terminals avec bornes libres						Superiore Upper Supérieur	Inferiore Lower Inférieur
	SC 15-24-5	MG1S2/14/G1	6201 2Z						6202 2Z	TIPO: B2