


COMPATTA 22-32



GIRANTE VORTEX
VORTEX IMPELLER
ROUE VORTEX


PASSAGGIO LIBERO	40mm
FREE PASSAGE	40mm
SECTION DE PASSAGE	40mm

ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2

Curves as per ISO 9906. Grade 2

Courbes selon ISO 9906. Niveau 2

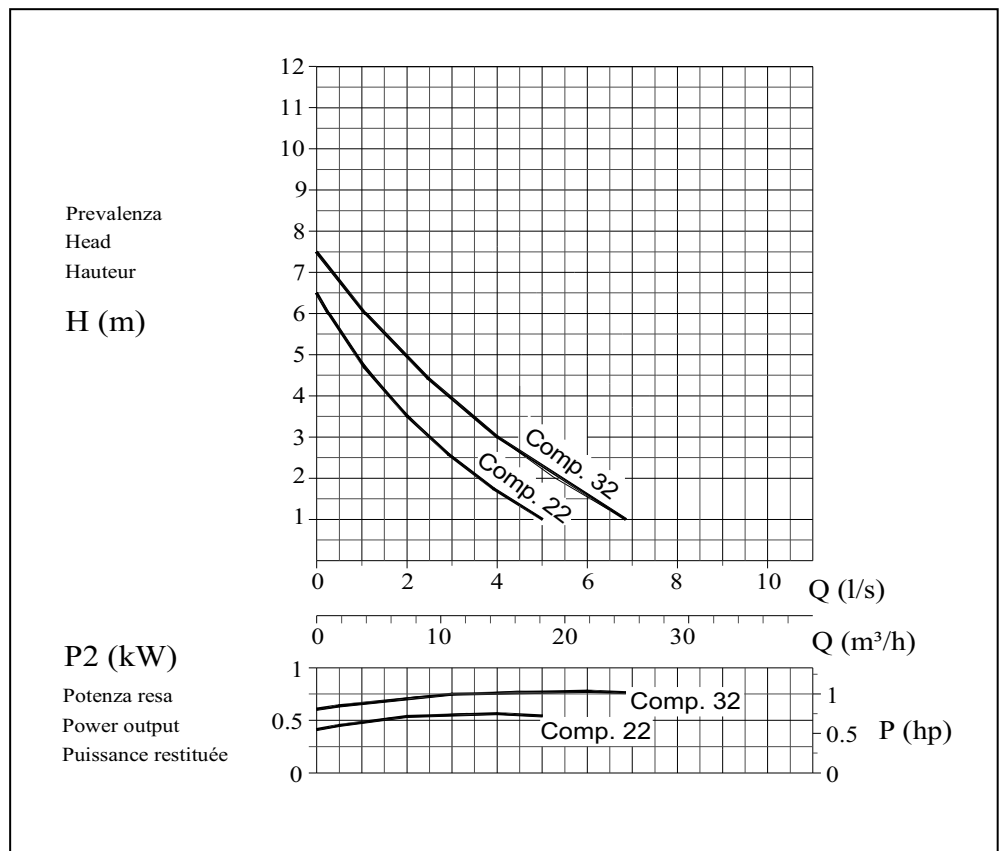

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza Head - Hauteur										
	Hm bar										
	1	2	3	4	5	6	7	8	9	10	11
	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1	1,1
	Portata - Capacity - Débit										
	Q (l/s)										
COMPATTA 22 T/M	5	3,5	2,5	1,5	0,8	0,25					
COMPATTA 32 T/M	6,8	5,5	4	3	2	1	0,4				

Dati tecnici / Specifications / Données

	Mandata Delivery Refoulement	kW		r.p.m	Poles	Hz	Ampere		
		P1	P2	1/min			1~		400 V 3~
							230 V	uf	
COMPATTA 22 T/M	G 2"	0,73	0,59	2850	2	50	4,3	16	1,5
COMPATTA 32 T/M		0,93	0,75	2850	2	50	5,1	20	1,9


M = 1~ 230 VOLT - 50 Hz T = 3~ 400 VOLT - 50 Hz

Dimensioni di ingombro

Overall dimensions of packing


Dimensions d'encombrement des emballages


TIPO-TYPE	X	Y	Z	Kg
COMPATTA 22 T/M	245	430	205	14,5
COMPATTA 32 T/M	245	430	205	15,5







Compatta 22-32

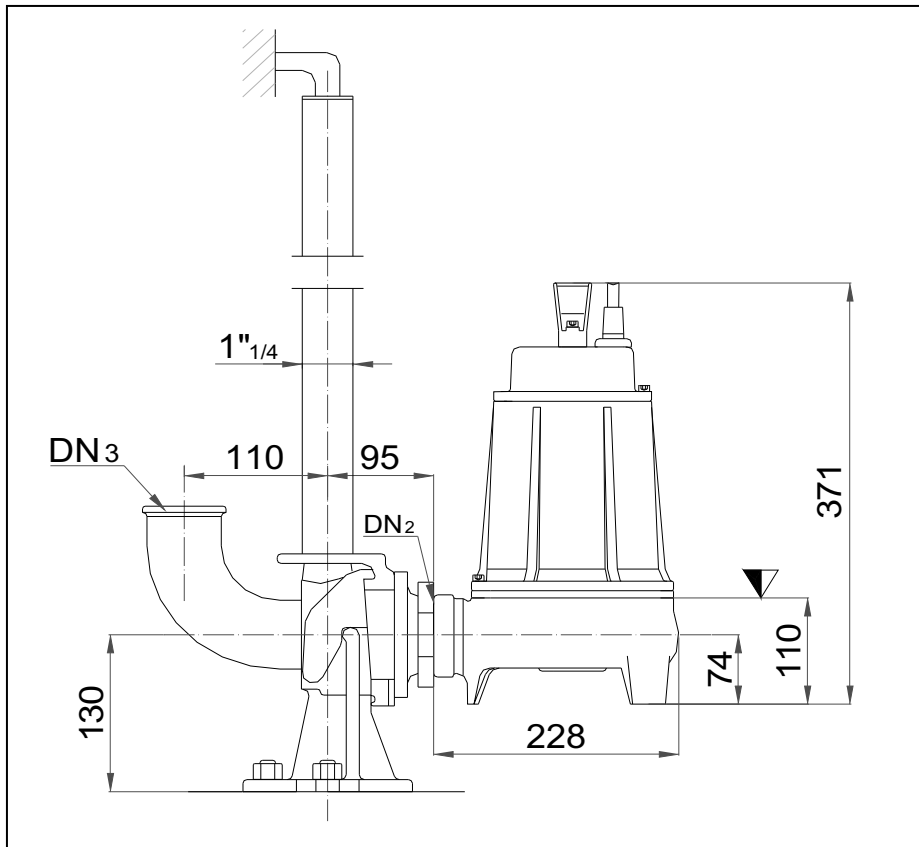INSTALLAZIONE FISSA
STATIONARY INSTALLATION
INSTALLATION FIXE



 Punto inferiore d'arresto nel caso di funzionamento automatico
Lowest shut-off point for automatic operation
Point d'arrêt le plus bas en service automatique

CARATTERISTICHE TECNICHE - TECHNICAL FEATURES - CARACTERISTIQUES TECHNIQUES

TIPO - TYPE	DN2 Mandata filettata	DN3	CAVO - CABLE H07 - RNF	MT					OPTIONAL
Compatta 22 M Compatta 32 M	G 2"	2"	(1) 3x1 ϕ 9 Schuko-plug	10					
Compatta 22 T Compatta 32 T			(1) 4x1 ϕ 10 con terminali liberi with free cable terminals avec bornes libres		Superiore Upper Supérieur	Inferiore Lower Inférieur	Superiore Upper Supérieur	Inferiore Lower Inférieur	
					SC 15-24-5	MG1S2/14/G1	6201 2Z	6202 2Z	TIPO:B3