


COMPATTA 4-5




GIRANTE VORTEX
VORTEX IMPELLER
ROUE VORTEX



PASSAGGIO LIBERO	50mm
FREE PASSAGE	50mm
SECTION DE PASSAGE	50mm

ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2
Curves as per ISO 9906. Grade 2
Courbes selon ISO 9906. Niveau 2

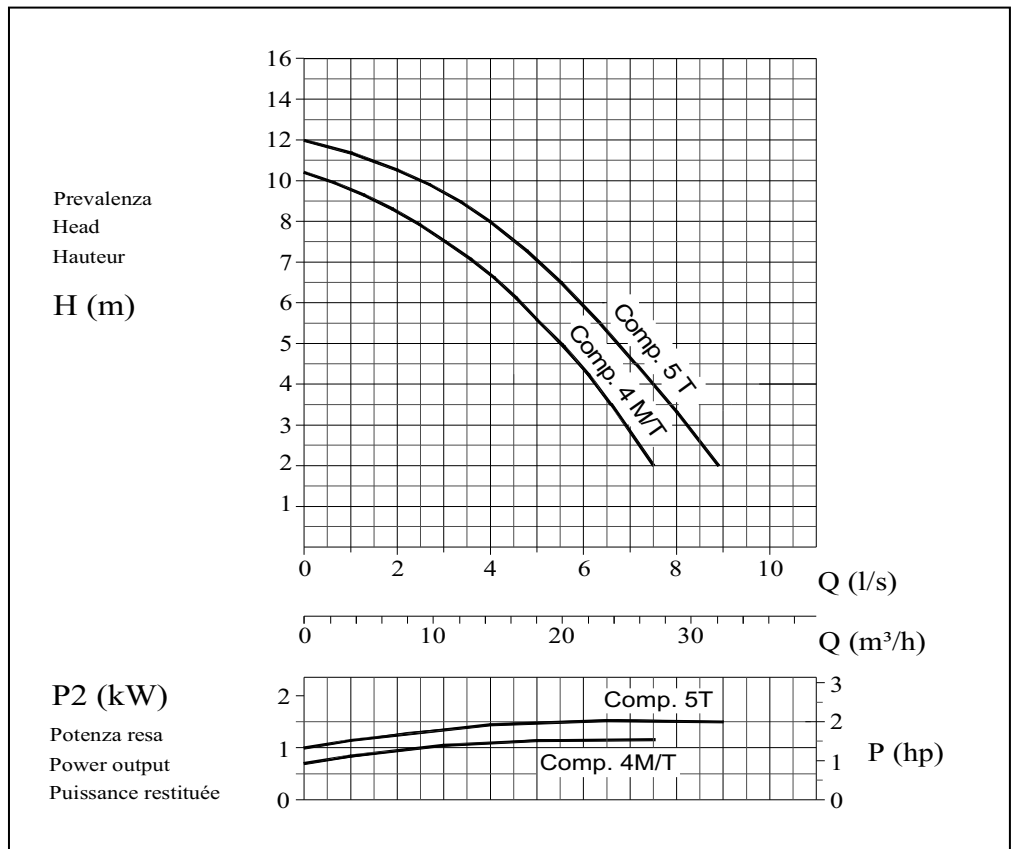

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza - Head - Hauteur										
	Hm bar										
	1	2	3	4	5	6	7	8	9	10	12
	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1	1,2
	Portata - Capacity - Débit										
	Q (l/s)										
COMPATTA 4 T/M		7,5	6,8	6,25	5,5	4,5	3,5	2,5	1,5	0,5	
COMPATTA 5 T		9	8,25	7,5	6,75	6	5	4	3,5	2,5	

Dati tecnici / Specifications / Données


	Mandata Delivery Refolement	kW		r.p.m 1/min	Poles	Hz	Ampere		
		P1	P2				230 V 1~		400 V 3~
		uf							
COMPATTA 4 T/M	G 2"	1,4	1,1	2850	2	50	8,3	30	2,8
COMPATTA 5 T		1,9	1,5	2850	2	50			3,6

M = 1~ 230 VOLT - 50 Hz T = 3~ 400 VOLT - 50 Hz

Dimensioni di ingombro
Overall dimensions of packing


Dimensions d'encombrement des emballages


TIPO-TYPE	X	Y	Z	Kg
COMPATTA 4 T/M	245	430	205	21
COMPATTA 5 T	245	430	205	22





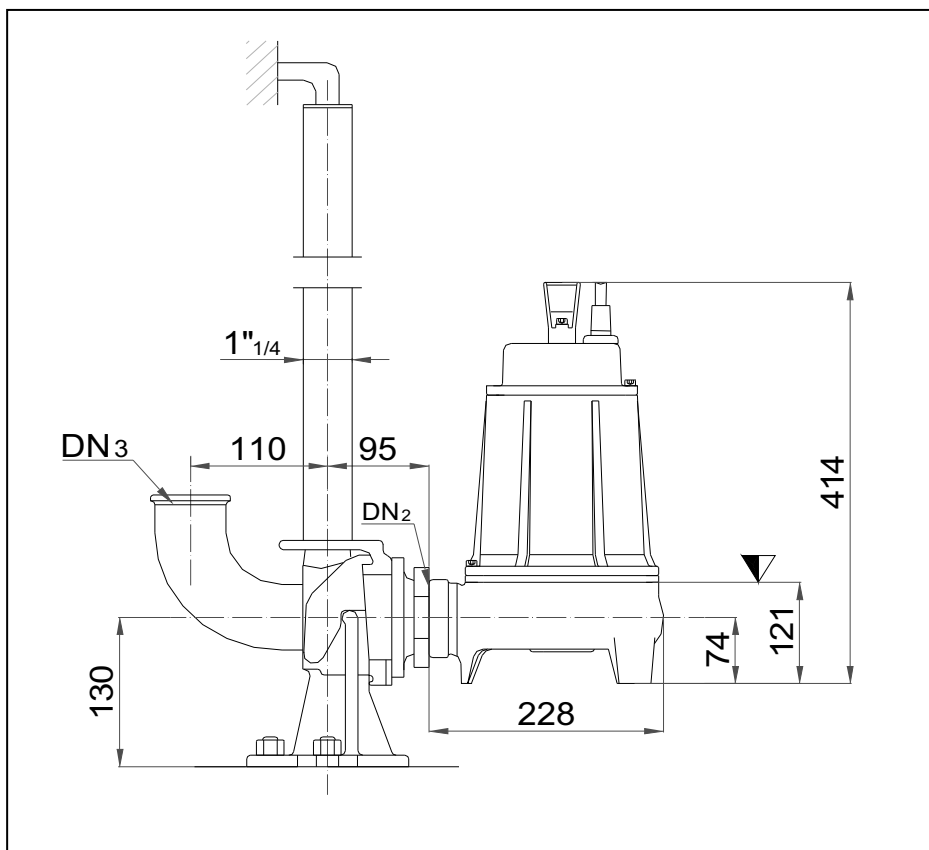


Compatta 4-5

INSTALLAZIONE FISSA
STATIONARY INSTALLATION
INSTALLATION FIXE



 Punto inferiore d'arresto nel caso di funzionamento automatico
Lowest shut-off point for automatic operation
Point d'arrêt le plus bas en service automatique

CARATTERISTICHE TECNICHE - TECHNICAL FEATURES - CARACTERISTIQUES TECHNIQUES

TIPO - TYPE	DN2 Mandata filettata	DN3	CAVO - CABLE H07 - RNF	MT					OPTIONAL
									
Compatta 4 M	G 2"	2"	(1) 3x1 ϕ 9 Schuko-plug	10	Superiore Upper Supérieur	Inferiore Lower Inférieur	Superiore Upper Supérieur	Inferiore Lower Inférieur	
Compatta 4 T Compatta 5 T			(1) 4x1 ϕ 10 con terminali liberi with free cable terminals avec bornes libres		SC15-24-5	MG1S2/14/G1	6202 2Z	6302 2Z	