


## COMPATTA 5-6



Su richiesta  
On request  
Sur requête




GIRANTE VORTEX  
VORTEX IMPELLER  
ROUE VORTEX

PASSAGGIO LIBERO	50mm
FREE PASSAGE	50mm
SECTION DE PASSAGE	50mm


ALBERO MOTORE	AISI 420
MOTOR SHAFT	AISI 420
ARBRE MOTEUR	AISI 420

Curve secondo ISO 9906. Livello 2  
Curves as per ISO 9906. Grade 2  
Courbes selon ISO 9906. Niveau 2

Prevalenza  
Head  
Hauteur  
H (m)

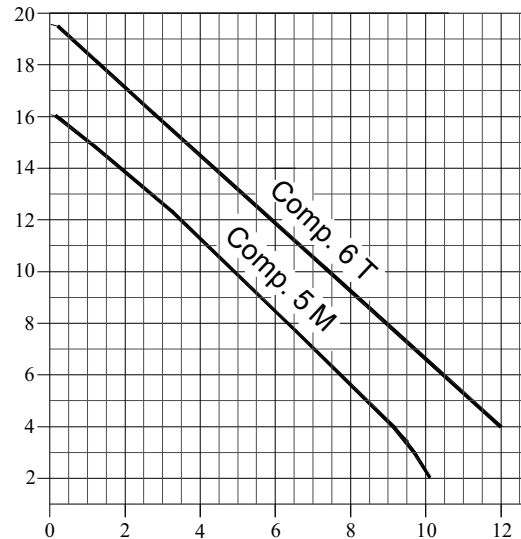

P2 (kW)  
Potenza resa  
Power output  
Puissance restituée

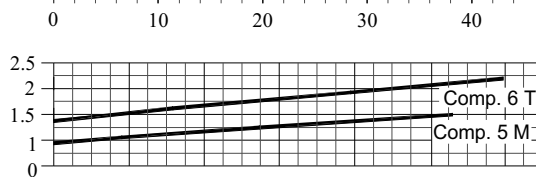

Q (l/s)

Q (m³/h)

P (hp)

Elettropompa Tipo Electric pump Type Electropompe Type	Prevalenza - Head - Hauteur										
	Hm bar										
	1	2	4	6	8	10	12	14	16	18	20
	Portata - Capacity - Débit										
	Q (l/s)										
COMPATTA 5 M		10	9	7,7	6,3	4,9	3,5	1,8			
COMPATTA 6 T			12	10,5	9	7,5	5,9	4,4	2,75	1,3	

### Dati tecnici / Specifications / Données


	Mandata Delivery Refoulement	kW		r.p.m	Poles	Hz	Ampere		
		P1	P2	1/min			1~		400 V 3~
							230 V	uf	
COMPATTA 5 M	G 2"	2	1,5	2850	2	50	9,2	40	
COMPATTA 6 T		3	2,2	2850	2	50			5,2

**M = 1~ 230 VOLT - 50 Hz      T = 3~ 400 VOLT - 50 Hz**

Dimensioni di ingombro  
Overall dimensions of packing

Dimensions d'encombrement des emballages


TIPO-TYPE	X	Y	Z	Kg
COMPATTA 5 M	245	430	205	21,5
COMPATTA 6 T	245	430	205	22




Data: 01/10/02  
Mod. 0





## Compatta 5-6

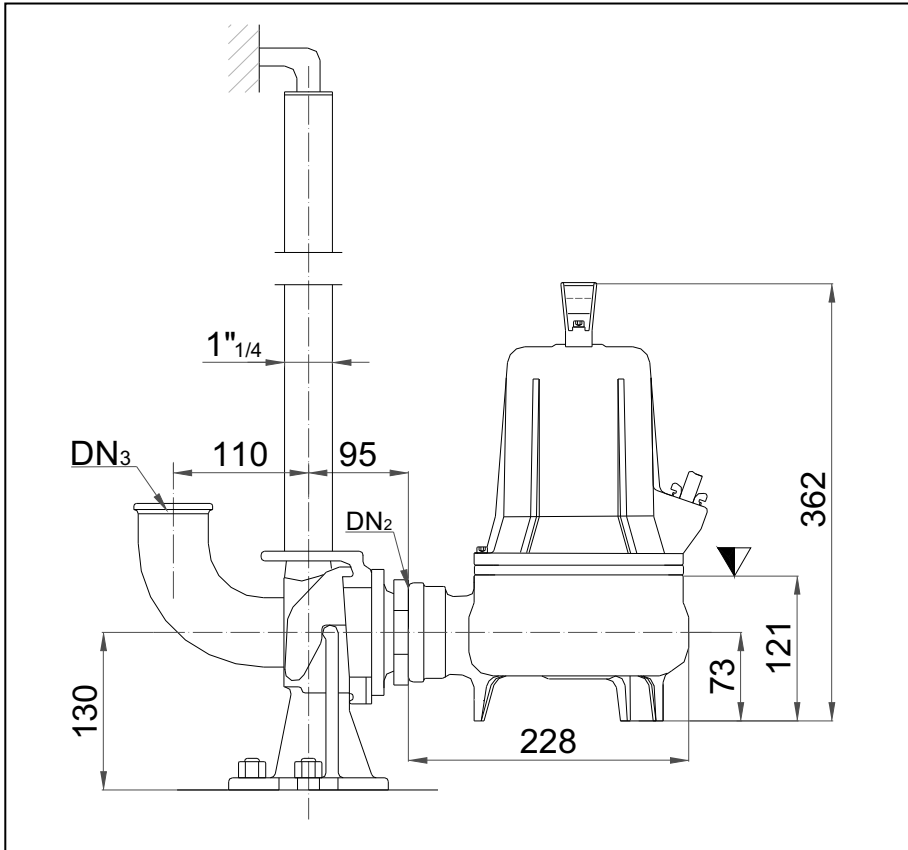INSTALLAZIONE FISSA  
STATIONARY INSTALLATION  
INSTALLATION FIXE



 Punto inferiore d'arresto nel caso di funzionamento automatico  
Lowest shut-off point for automatic operation  
Point d'arrêt le plus bas en service automatique

### CARATTERISTICHE TECNICHE - TECHNICAL FEATURES - CARACTERISTIQUES TECHNIQUES

TIPO - TYPE	DN2 Mandata filettata	DN3	CAVO - CABLE H07 - RNF	MT				OPTIONAL	
Compatta 5 M	G 2"	2"	(1) 4x1,5 $\phi$ 11,5 Pannello di controllo Control panel Tableau automatique	10	Superiore Upper Supérieur	Inferiore Lower Inférieur	Superiore Upper Supérieur	Inferiore Lower Inférieur	
Compatta 6 T			(1) 4x1,5 $\phi$ 11,5 con terminali liberi free cable terminals with avec bornes libres		SC 15/24/5	MG1S2/14/G1	6202 2Z	6302 2Z	